


Terms

- Cloud Gateways
- Switching
- WiFi
- Camera Security
- Door Access
- Integrations
- Accessory Tech
- Identity
- Support
- Store
- UniFi
- UISP
- Branding

- Cloud Gateways
- Switching
- WiFi
- Camera Security
- Door Access
- Integrations
- Advanced Hosting
- Accessories
- Back
- Compact
- Cloud Gateway Ultra




- Cloud Gateway Ultra
- UCG-Ultra
- Datasheet
- In The Box
- Marketing Images
- Installation Guide

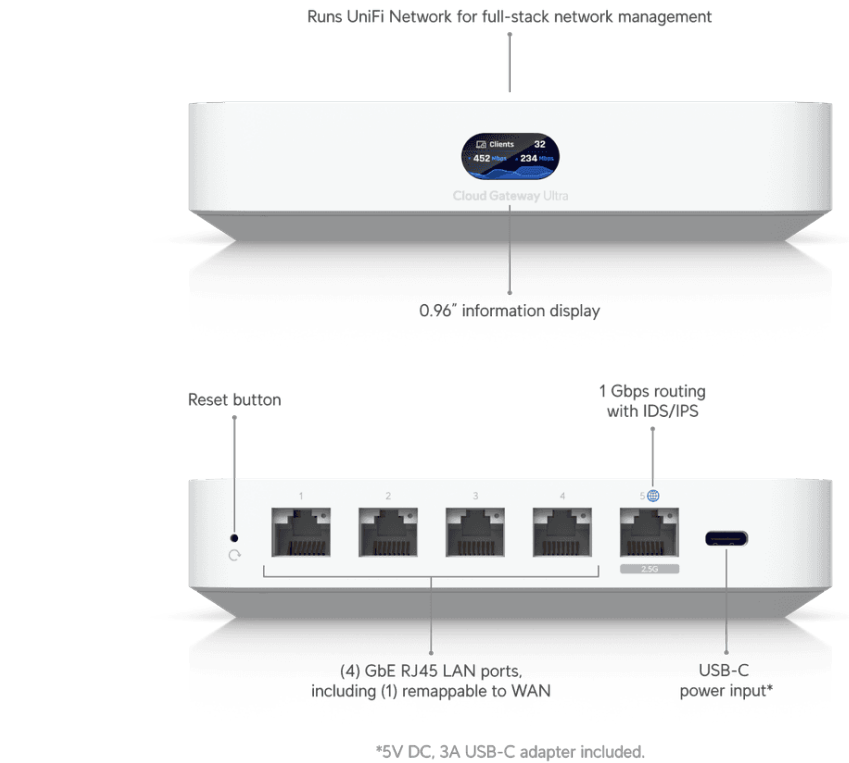

Zoom in



Zoom in

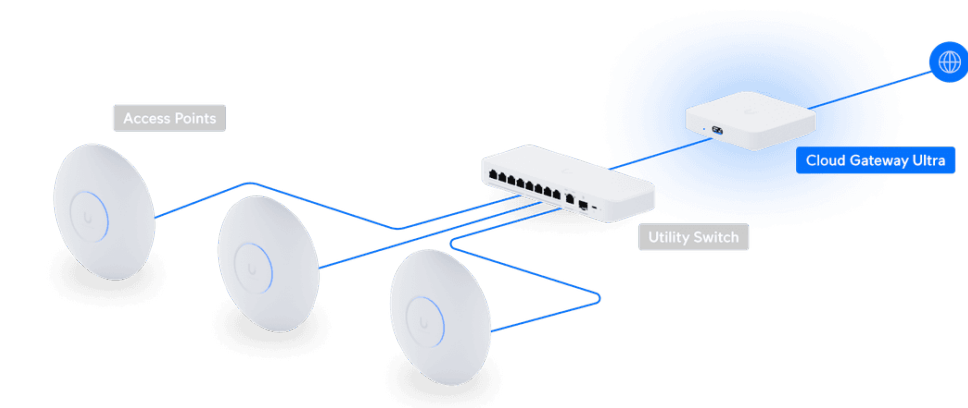

Zoom in

Overview
Dimensions
141.8 x 127.6 x 30 mm (5.6 x 5 x 1.2")
UniFi Application Suite
Network
Managed UniFi Devices
30+
Simultaneous Users Connected
300+
Max. WAN Port Count
4
Default WAN Ports
(1) 2.5 GbE RJ45
Port Layout
1 GbE RJ45
4 (1G/100M/10M)
2.5 GbE RJ45
1 (2.5G/1G/100M/10M)
IDS/IPS Throughput
1 Gbps
Form Factor
Compact desktop
Security
Stateful Firewall
Application-Aware Layer 7 Firewall
DPI & Traffic Identification
Zone-Based Firewall Advanced Filtering (Regions, Domains, Apps)
Content Filtering
Intrusion Prevention (IPS/IDS)
Ad Blocking
IDS/IPS Signatures
55,000+ with CyberSecure
VLAN/Subnet-based Traffic Segmentation
VPN & SD-WAN
License-Free SD-WAN
Site-to-Site VPN
Site Magic
IPsec

OpenVPN

VPN Server
Identity Endpoint One-Click VPN

Teleport Zero-Configuration VPN

WireGuard

OpenVPN

L2TP

VPN Client
OpenVPN

WireGuard

Networking
Multi-WAN Load Balancing

Dynamic Routing
OSPF

Advanced QoS

Multicast DNS (mDNS)

Advanced NAT (SNAT / DNAT / Masquerade / NAT Pooling / 1-to-1 NAT)

Integrated RADIUS Server

RADIUS over TLS (RadSec)

Additional Internet Failover with UniFi LTE Backup

Internet Quality and Outage Reporting

MAC Address Table Size
2,000
Policy-based WAN and VPN Routing

Customizable DHCP Server

IPv6 ISP Support

IGMP Proxy

Virtual Network Override

Hardware

Max. Power Consumption
6.2W

Power Method

USB type C (5V DC/3A)

Power Supply

USB type C (5V DC/3A) (Adapter included)

Supported Voltage Range
100—240V AC

Heat Dissipation
21 BTU/hr

Processor

Quad-core ARM® Cortex®-A53 at 1.5 GHz

System Memory
3 GB

On-board Storage
16 GB

Weight
520 g (1.1 lb)

Enclosure Material
Polycarbonate

LCM Display
0.96" status display

Management

Ethernet Bluetooth

LEDs

Ethernet

Button

(1) Factory-reset

Ambient Operating Temperature
-10 to 40° C (14 to 104° F)

Ambient Operating Humidity
5 to 95% noncondensing

NDAA Compliant

Certifications

CE, FCC, IC, Anatel: 04653-24-08356, SRRC

Software

Application Requirements

Mobile App

UniFi iOS™: Version 10.12.0 and later UniFi Android™: Version 10.11.2 and later

Company

Blog

Case Studies

Careers

Trust Center

Contact Us

Investors

Compliance

Training

Courses

Calendar

Trainers

Become a Trainer

Buy Now

Ubiquiti Store

Find a Distributor

Become a Distributor

Tools

WiFiman

UISP

UniFi Design Center

UISP Design Center

Downloads

Stay in Touch

Subscribe

			
--	---	---	---

Terms of Service|

Privacy Policy|

Legal|